

Features

- Outdoor meter enclosures may contain E-Mon D-Mon® Class 1000, 2000, 2100 and Green Class Meters (Not available in 1 PH, 277V Configurations.)
- NEMA 4X rated outdoor enclosure made of hot compression molded fiberglass reinforced polyester.
- 1¹/₁₆" KO (3/4" cond.) on bottom of enclosure.
- Padlocking hasp.
- Available Configurations:
 - 3-Phase, 4-Wire
 - 3-Phase, 3-Wire
 - 2-Phase, 3-Wire
- Temp. Range:
 - (-20°C to +55°C)
- Flammability Rating: UL94-5V
- Self Extinguishing: Non-flame propogating




Model Numbers

When ordering, add suffix "R" to the end of the standard meter model number.

Example: 208200-R KIT

Note: Outdoor meter enclosures are available for E-Mon D-Mon Class 1000 (except 277V 2-wire meters), 2000, 2100 and Green Class meters only.

Enclosure Dimensions

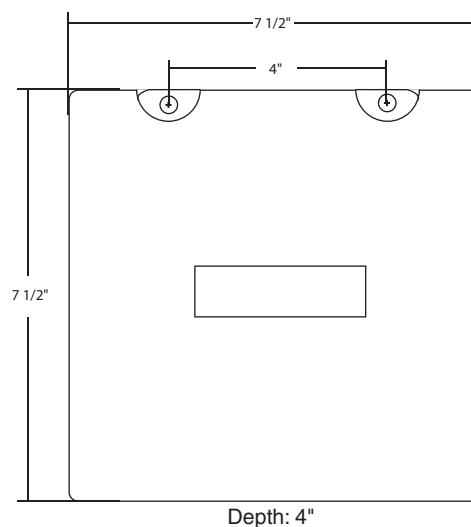

Front View